

AC AMMETERS, DIRECT INPUT 25A



2RID36.25A



2RID48.25A



2RID72.25A



2RID96.25A

- **BURDEN**
- **STANDARD POWER SUPPLY**
- **OPERATING FREQUENCY**
- **CAPACITY**

0,5VA
galvanically insulated, at 230V +/-10% (different power supply on request)
50/60 Hz
25A



■ **EXAMPLES WHEN ORDERING**

2RID36.25A digital ammeter (36x72mm) power supply 230V
2RID72.25A 24 digital ammeter (72x72mm) power supply 24VAC

2RID48.25A 110 digital ammeter (48x96mm) power supply 110VAC
2RID96.25A 24C digital ammeter (96x96mm) power supply 24VDC

■ **WEIGHT (kg):**

2RID36.25A (0,23) 2RID48.25A (0,30) 2RID72.25A (0,26) 2RID96.25A (0,32)

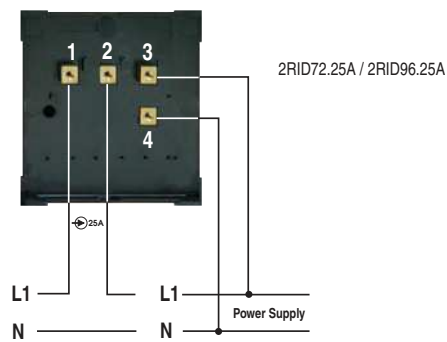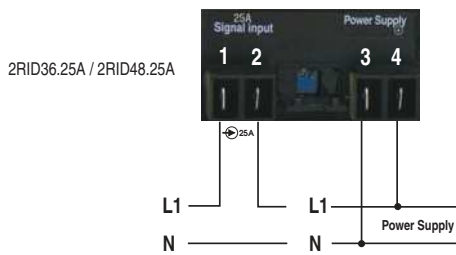

FREQUENCYMETER



2RFD36



2RFD48



2RFD72



2RFD96

- **BURDEN**
- **STANDARD POWER SUPPLY**
- **STANDARD CAPACITIES**
- **Different capacities can be carried out on request (example 400Hz)**

0,5VA
galvanically insulated, at 230V +/-10%
(different power supply on request)
40...80Hz input voltage from 60V to 600V

■ **EXAMPLES WHEN ORDERING**

2RFD36 frequencymeter (36x72mm) power supply 230V
2RFD72 frequencymeter (72x72mm) power supply 230V

2RFD48 110 frequencymeter (48x96mm) power supply 110VAC
2RFD96 24C frequencymeter (96x96mm) power supply 24VDC

■ **WEIGHT (kg):**

2RFD36 (0,23) 2RFD48 (0,30) 2RFD72 (0,26) 2RFD96 (0,32)

