

MODEL NO. ATX1565GA1 650W

This specification describes the requirements of **650 Watts** switching power supply with an stretch ATX form-factor and EPS 12V, +5V standby voltage, remote on/off control, full range line input capability and forced air cooling characteristics.

1. AC INPUT**1.1 AC input requirements**

The input voltage, current, and frequency requirements for continuous operation are stated below.

Table 1 AC Input Line Requirements

Parameter	Min.	Nom.	Max.	Unit
Vin(Full range)	90	100---240	264	VACrms
Vin Frequency	47	60----50	63	Hz
Iin(650W)		9-----4.5		Arms

Power factor correction (PF)>0.90 at full load.

The power supply must meet inrush requirements for any rated AC voltage, during turn on at any phase of AC voltage, during a single cycle AC dropout condition, during repetitive ON/OFF cycling of AC, and over the specified temperature range (Top). The peak inrush current shall be less than the ratings of its critical components (including input fuse, bulk rectifiers, and surge limiting device).

2. DC OUTPUT**2.1 DC voltage regulation**

Parameter	Range	Min	Nom.	Max	Unit
+3.3V	+/-5%	+3.14	+3.30	+3.47	Volts
+5V	+/-5%	+4.75	+5.00	+5.25	Volts
+12V	+/-5%	+11.40	+12.00	+12.60	Volts
-12V	+/-10%	-13.20	-12.00	-10.80	Volts
+5VSB	+/-5%	+4.75	+5.00	+5.25	Volts

Note:1>Voltage tolerance is required at main connector and S-ATA connector(if used)

2>Output transient response tested DC voltage regulation range +5V,+12V,+3.3V,-12V ±5%

2.2 Load ranges**2.2.6: (650 Watts Load Range)**

Parameter	Min	Nom.	Max	Peak	Unit
+3.3V	0.1	-	20		Amps
+5V	0.2	-	18		Amps
+12V	0.15	-	54		Amps
-12V	0	-	0.3		Amps
+5VSB	0	-	2.5		Amps

1.Maximum continuous total DC output power should not exceed **650W**.

2.Maximum continuous combined load on +3.3V and +5V outputs shall not exceed **120W**.

3.Maximum combined current for the +12V outputs shall be **54A(648W)**.

2.3 Output Ripple

2.3.1 Ripple regulation

Parameter	Ripple&Noise	Unit
+3.3V	50	mVp-p
+5V	50	mVp-p
+12V	120	mVp-p
-12V	120	mVp-p
+5VSB	50	mVp-p

2.3.2 Definition

The ripple voltage of the outputs shall be measured at the pins of the output connector when terminated in the load impedance specified in figure 1. Ripple and noise are measured at the connectors with a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor to simulate system loading. Ripple shall be measured under any condition of line voltage, output load, line frequency, operation temperature.

2.3.3 Ripple voltage test circuit

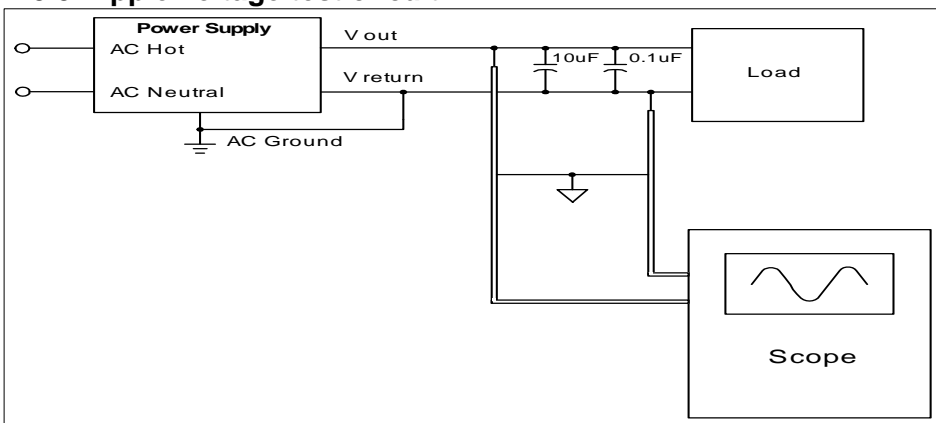


Figure 1. Ripple voltage test circuit

2.4 Overshoot

Any overshoot at turn on or turn off shall be less 10% of the nominal voltage value, all outputs shall be within the regulation limit of section 2.0 before issuing the power good signal of section 5.0.

2.5 Efficiency

Power supply efficiency typical **87%** at normal voltage and full load on all outputs.

2.6 Remote ON/OFF control

When the logic level "PS-ON" is low, the DC outputs are to be enabled.

When the logic level is high or open collector, the DC outputs are to be disabled.

3.0 PROTECTION

3.1 Over current protection

The power supply shall have current limit to prevent the +3.3V,+5V,and +12V outputs from exceeding the values shown in the following Table. If the current limits are exceeded the power supply shall shutdown and latch off.

650W (單組)

Voltage	Over Current Limit (lout limit)
+12V	55A minimum; 80A maximum
+5V	24A minimum; 45A maximum
+3.3V	25A minimum; 45A maximum

3.2 Over Temperature Protection

The power supply will be protected against over temperature conditions caused by loss of fan cooling or excessive ambient temperature. In an OTP condition the PSU will shutdown. When the power supply temperature drops to within specified limits, the power supply shall restore power automatically. The OTP circuit must have built in hysteresis such that the power supply will not oscillate on and off due to temperature recovering condition.

3.3 Over-power protection

The power supply will be shutdown and latch off when output power within 120~160% of rated DC output.

Note: Assurance machine can work at low voltage, full load won't damage machine.

3.4 Under voltage protection.

In an under voltage fault occurs, the supply will latch all DC outputs into a shutdown state when +12V,+5V & +3.3V outputs under 85% of it's maximum value.

3.5 Over voltage protection

The over voltage sense circuitry and reference shall reside in packages that are separate and distinct from the regulator control circuitry and reference. No single point fault shall be able to cause a sustained over voltage condition on any or all outputs. The supply shall provide latch-mode over voltage protection as defined in Table.

Output	Minimum	Nominal	Maximum	Unit
+12 VDC	13	15	17	Volts
+5 VDC	5.5	6	7	Volts
+3.3 VDC	3.6	4	5	Volts

3.6 Short circuit

An output short circuit is defined as any output impedance of less than 0.1 ohms. The power supply shall shut down and latch off for shorting the +3.3 VDC,+5 VDC,or+12 VDC rails to return or any other rail. Shorts between main output rails and +5VSB shall not cause any damage to the power supply. The power supply shall either shut down and latch off or fold back for shorting the negative rails.+5VSB must be capable of being shorted indefinitely, but when the short is removed, the power supply shall recover automatically or by cycling PS_ON#.The power supply shall be capable of withstanding a continuous short-circuit to the output without damage or overstress to the unit

3.7 No load operation

No damage or hazardous condition should occur with all the DC output connectors disconnected from the load. The power supply may latch into the shutdown state.

4. TIMING**4.1 Signal timing drawing**

Figure 2. is a reference for signal timing for main power connector signals and rails.

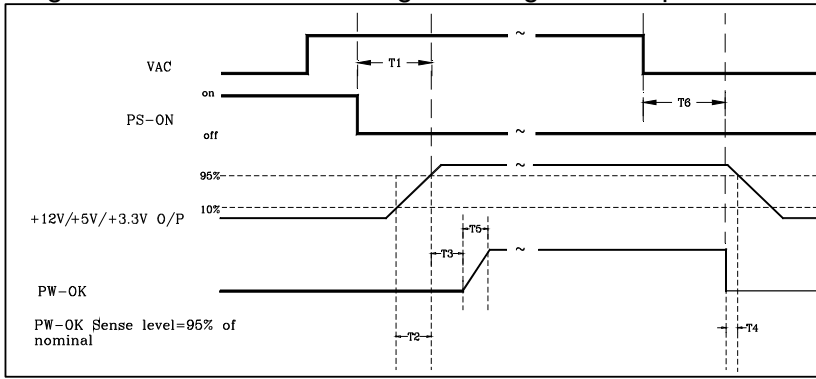


Figure 2. PS-OK Timing Sequence

- (1)T3: Power good signal turn on delay time (100ms~500ms)
- (2)T4: Power good signal turn off delay time (**75%**Load 1ms min)
- (3)T2: Rise time (0.1~20ms)
- (4)T6: Hold up time (**75%**Load 16ms)

4.2 Hold up time

When the power loss its input power, it shall maintain **16ms** in regulation limit at normal input voltage and **75%** full load (AC:115V/60Hz or 230V/50Hz)

5. ENVIRONMENT

5.1 Operation

Temperature	0 to 40°C
Relative Humidity	10 to 90%, non-condensing

5.2 Shipping and Storage

Temperature	-20 to 90°C
Relative Humidity	5 to 95%, non-condensing

5.3 Altitude

Operating	2000m
Storage	3000m

6. SAFETY

6.1 Underwriters Laboratory (UL) recognition.

The power supply designed to meet UL 60950

7. ELECTROMAGNETIC COMPATIBILITY (EMC)

7.1 ELECTROSTATIC DISCHARGE (ESD) – IEC 61000-4-2(EN 61000-4-2).

7.2 RADIATED SUSCEPTIBILITY – IEC 61000-4-3(EN 61000-4-3).

7.3 ELECTRICAL FAST TRANSIENT / BURST (EFT/B) – IEC 61000-4 -4(EN 61000-4-4).

7.4 SURGE – IEC 61000-4-5(EN 61000-4-5).

7.5 CONDUCTED SUSCEPTIBILITY – IEC 61000-4-6(EN 61000-4-6).

7.6 POWER FREQUENCY MAGNETIC FIELD – IEC 61000-4-8(EN 61000-4-8).

7.7 VOLTAGE DIPS – IEC 61000-4-11(EN 61000-4-11).

7.8 VOLTAGE FLUCTUATIONS – IEC 61000-3-3 (EN 61000-3-3).

7.9 HARMONIC CURRENT EMISSION – IEC61000-3-2(EN 61000-3-2).

7.10 EN55032:Class B Radio interference (CISPR 22).

7.11 ANSI C63.4-2009 / FCC Part 15 Subpart B / ICES-003 Issue 5 Class B 115VAC operation.



8. MTBF

8.1 MTBF (mean time between failures) calculation

The demonstrated MTBF shall be 100,000 hours of continuous operation at 25°C,at 80% load, and nominal line. The MTBF of the power supply be calculated in accordance with MIL-HDBK-217F. The DC FAN is not included.

9. MECHANICAL REQUIREMENTS

9.1 Physical dimension (L150mm*W140mm*H86mm)

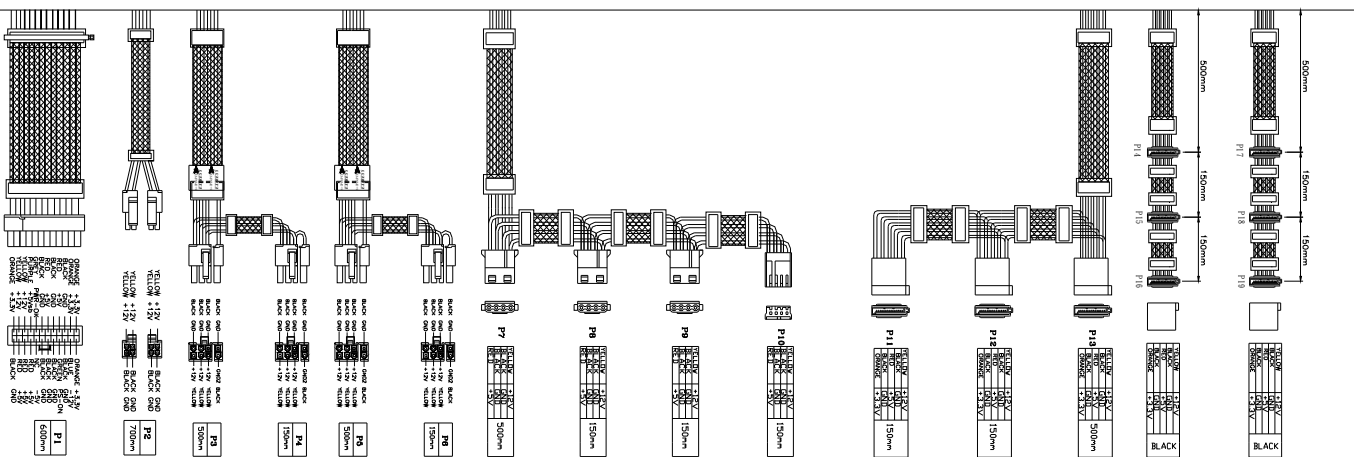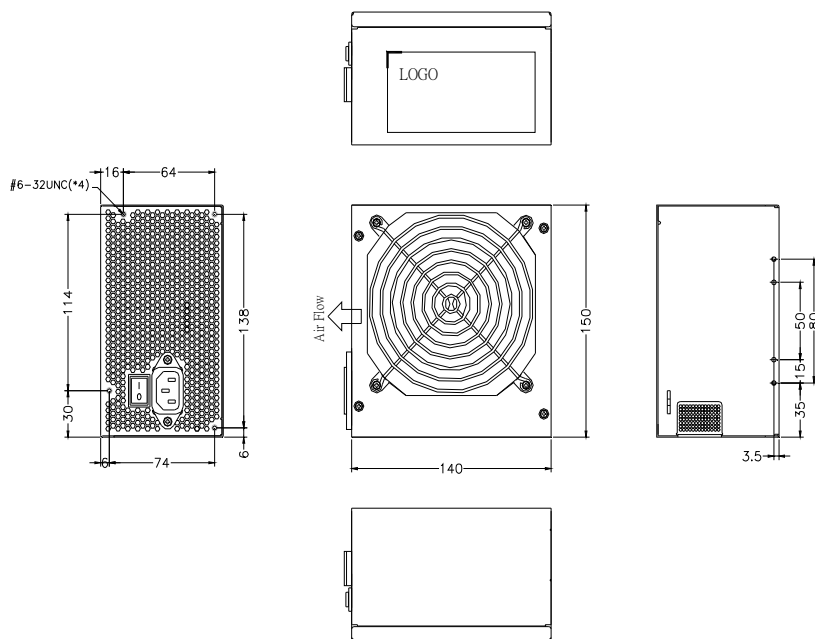

9.2 Connectors (INTEL approved or equivalent)

P1 Connector (24PIN:Molex 44476-1111 or equivalent)

18AWG wire	Signal	Pin	Pin	Signal	18AWG wire
Orange	+3.3V	11	1	+3.3V	Orange

Orange(22AWG)	+3.3Vsense	11	1	+3.3V	Orange
Blue (20AWG)	-12V	12	2	+3.3V	Orange
Black	GND	13	3	GND	Black
Green (20AWG)	PS-ON	14	4	+5V	Red
				+5Vsense	Red (22AWG)
Black	GND	15	5	GND	Black
Black	GND	16	6	+5V	Red
Black	GND	17	7	GND	Black
NC	-5V	18	8	PW-OK	Gray (20AWG)
Red	+5V	19	9	+5Vsb	Purple
Red	+5V	20	10	+12V	Yellow
Red	+5V	T3	T1	+12V	Yellow
Black	GND	T4	T2	+3.3V	Orange

P2 (Motherboard 4+4Pin) Power Connector

18AWG wire	Signal	Pin	Pin	Signal	18AWG wire
Black	GND	1	1	GND	Black
Black	GND	2	2	GND	Black
Yellow	+12V	3	3	+12V	Yellow
Yellow	+12V	4	4	+12V	Yellow

P3,P4,P5,P6 (AMP P6-I42002K21 or or equivalent)(PCI E)

18AWG wire	Signal	Pin	Pin	Signal	22AWG wire
Yellow	+12V	1	4	COM	Black
Yellow	+12V	2	5	COM	Black
Yellow	+12V	3	6	COM	Black
Black	COM	1	2	COM	Black

P7,P8,P9 大4PIN Power Connector

P10 小4PIN Power Connector

18 AWG wire	Signal	Pin	Pin	Signal	22AWG wire
Yellow	+12V	1	1	+12V	Yellow
Black	GND	2	2	GND	Black
Black	GND	3	3	GND	Black
Red	+5V	4	4	+5V	Red

P11,P12,P13,P14,P15 SATA Power Connector

18AWG wire	Signal	Pin
Orange	+3.3V	5
Black	GND	4
Red	+5V	3
Black	GND	2
Yellow	+12V	1

10. FAN SPEED CONTROL

Fan voltage varies with the ambient temperature or output power.

