




Speciality Magnetic Components  
QUALIFIED TO ISO 9001:2008

## PCB Mounting Hall Effect Current Transformer Type HTP50/2K

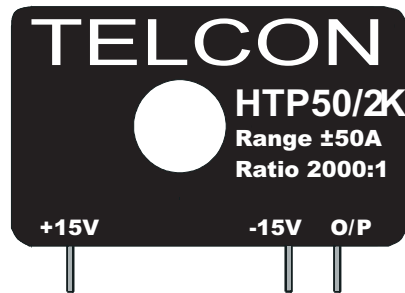

---

The HTP50/2K is a closed loop Hall Effect Current Transformer suitable for measuring currents up to 50A. The product provides an output current into an external load resistance.

---

### Features

- High Accuracy
- 3kV Proof Stress
- Fast Response
- Designed In Quality

### Benefits

- Galvanic Isolation
- Wide Dynamic Range
- Non - Invasive
- High Reliability

### Applications

- Variable Speed Drives
- UPS Systems
- D.C Power Supplies
- Low Frequency Current Measurement
- Overcurrent Protection
- Robotics
- Frequency Inverters
- Power Factor Monitoring

As part of our policy of continuous product improvement, we reserve the right to make modifications to this product without prior notice.

---

## TECHNICAL DATA

Nominal Primary Current	50A
Turns Ratio	2000:1
Nominal Power Supply	$\pm 15V \pm 5\%$
Supply Current	16mA per rail + output current
Minimum Load Resistance	45 $\Omega$
Operating Temperature Range	0 to +70°C
Storage Temperature Range	-25°C to +85°C

---

## SPECIFICATION

Linearity	0.1% of nominal primary current
Limit of linearity	$\pm 105A$ peak
Overall accuracy	0.5% of nominal primary current
Output Offset Current	$< \pm 200\mu A$ at primary current = 0A
Zero Offset /Temperature	$< 5\mu A/^{\circ}C$
Zero Offset/Supply Variation	$< 5\mu A/V$
Coil Resistance	157 $\Omega$
Bandwidth (-1dB)	dc to 100kHz
di/dt following	$> 150A/\mu s$
Delay time	0.1 $\mu s$
dV/dt Immunity	10kV/ $\mu s$
Proof Stress Voltage	3kV a.c., r.m.s, 50Hz for 1minute

---

## GENERAL DATA

Weight	20g nominal
Housing	Modified Polyphenylene Oxide
Mounting	Direct mounting to PCB by 3 pins
Signal Sense	Positive output obtained when current flows in the direction of the arrow
Conductor Temperature	The temperature of the primary conductor should not exceed 100°C
Conductor Position	Optimum dynamic performance is achieved with a single conductor filling the bore

---

## DIMENSIONS

