
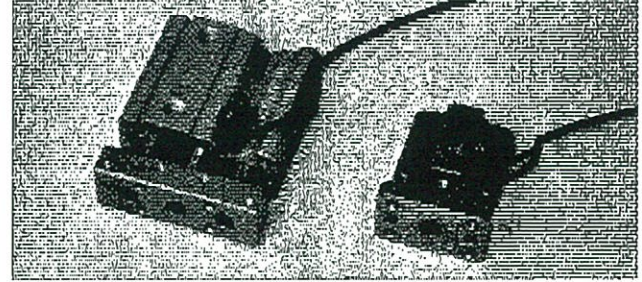


# RCB series

## SENSOR SWITCH

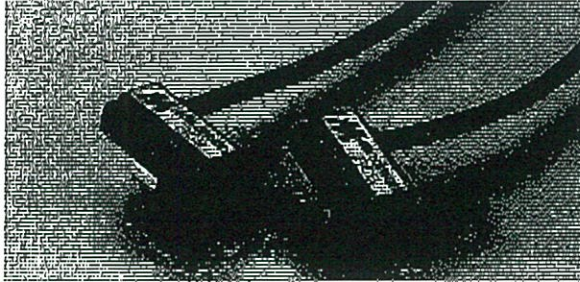

### Order example

RCB —

*Blank*


#### MODEL

- KCB: Reed switch
- RDB: Non-contact
- RNB: NPN
- RNBE: NPN
- RPB: PNP
- RPBE: PNP


#### WIRE LENGTH

- Blank: L=2000mm
- 1M: L=1000mm
- QD: M8, 3 Pin connector
- EQD: M8, 3 Pin connector
- \* Special order is available.


### Assembling style

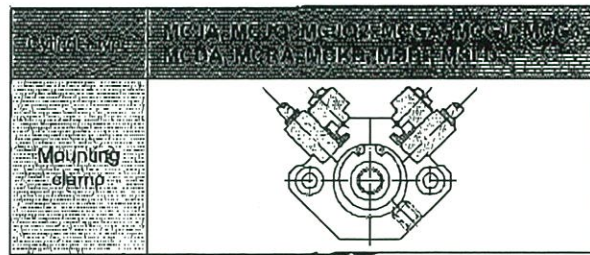

### Dimension

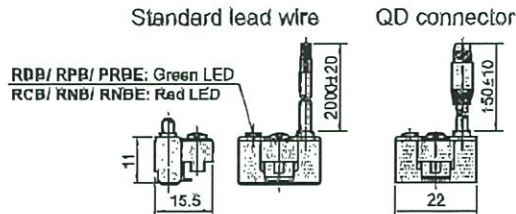

### Wiring of the QD

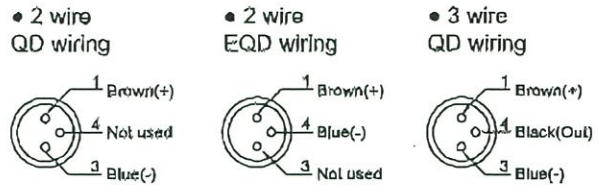

### Specification

Model	RCB	RDB	RNB	RNBE	RPE	RPBE
Wiring method	2 wire		3 wire			
Switching logic	SPST normally open		Solid state output, normally open			
Switch type	Reed switch	Non-contact	NPN current sinking		PNP current sourcing	
Operating voltage	5-240V DC/AC		5-30V DC			
Switching current	100mA max.	50mA max.	200mA max.			
Switching rating	10W max.	1.5W max.	6W max.			
Current consumption	-		22 mA@24V DC max.	6 mA@24V DC max.	20 mA@24V DC max.	8 mA@24V DC max.
Voltage drop	3.5V max.	0.7V max.	0.5V max.			
Leakage current	-		0.01mA max.			
Indicator	Red LED	Green LED	Red LED		Green LED	
Cable	ø3.3, 2C, PVC		ø3.3, 3C, PVC			
Temperature range	-10~+70°C (No-freezing)					
Shock (2)	30G		50G			
Vibration (3)	9G					
Enclosure classification	IEC 60529 IP67					
Protection circuit (4)	1		3,4			
Weight	33 g (2m cable)					
Circuit diagram						

\*1. Warning: Never exceed rating (watt=voltage\*amperage). Permanent damage to sensor will occur.  
 \*2. Sin wave / X.Y.Z. 3 directions / 3 times each direction / 11ms each time.  
 \*3. Double amplitude 1.5mm / 10Hz-55Hz-10Hz(Sweep 1min) / X.Y.Z. 3 directions / 1 hour each time.  
 \*4. 1=None / 2=Short-circuit / 3=Power source reverse polarity / 4=Surge suppression  
 \*5. Caution for safety please refer to the page 10-3~4.