


B BONTHRON
& EWING AB



Torque Wrenches

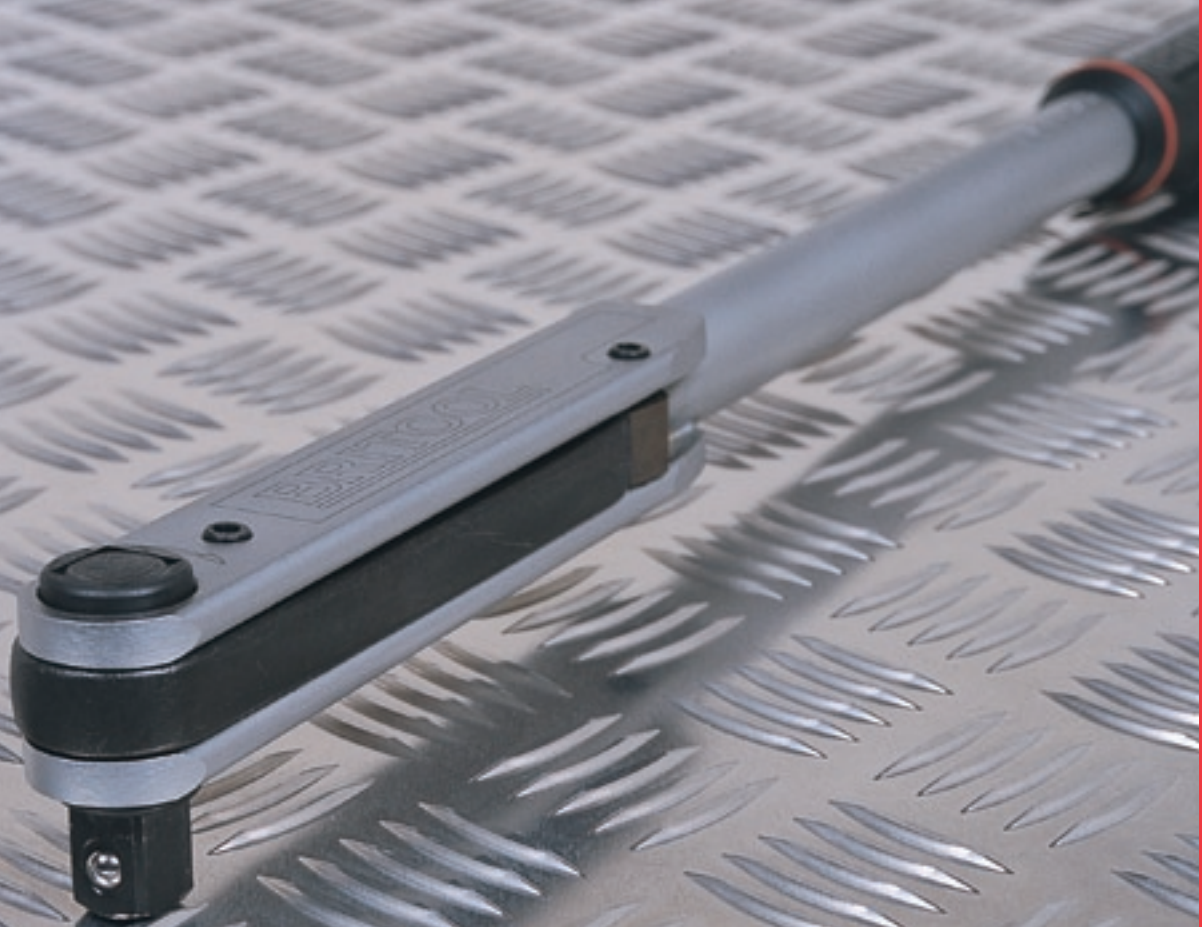

08-514 307 60

www.bonthron-ewing.se

Classic Mechanical Torque Wrenches

The torque wrench is an essential and sometimes mandatory tool that is now fundamental in most garages and workshops. The Britool torque wrench range has been carefully designed to provide a range of solutions to meet the needs of the torque-tightening user.

Unique 3-phase Mechanism

A progressive torque build-up to the selected setting is easily detected by three clear signals:

1. **SIGHT**—see the mechanism progressively move towards the point of break as the load is applied
 2. **TOUCH**—feel the point of torque
 3. **SOUND**—unmistakeable CLICK
- This makes it ideal for use in noisy environments

Accuracy

- Exceeds requirements of ISO 6789
- Certified accuracy to within +/-4%



BONTHRON & EWING AB

i

A and E series adjustable torque wrenches are supplied in a sturdy plastic storage case.

3/8" and 1/2" Square Drive

Ref.	Square Drive	Torque Range				Length	kg
		Nm	kg.m	lbf.in	lbf.ft		
AVT100A	3/8"	2.5-11	0.3-1.2	20-100	2-8	318	0.56
AVT300A	3/8"	5-33	0.5-3.4	40-300	4-24	422	0.71
AVT600	3/8"	12-68	1.2-7	100-600	10-50	476	1.02
EVT600A	1/2"	12-68	1.2-7	100-600	10-50	476	1.02
EVT1200A	1/2"	25-135	3-14	200-1200	20-100	546	1.62
EVT2000A	1/2"	50-225	5-23	400-2000	40-160	597	2.38
EVT3000A	1/2"	70-330	7-35	600-3000	50-250	825	3.12


All models are supplied in a sturdy blow moulded safe box and a calibration certificate in compliance with ISO 6789

3/4" and 1" Square Drive

Ref.	Square Drive	Torque Range		Length	kg
		Nm	lbf.ft		
HVT5000	3/4"	140-560	100-410	1130	6.58
HVT7200	3/4"	200-810	150-600	1181	7.00
GVT8400	1"	480-940	350-700	1397	12.70

All models are supplied in a sturdy metal safe box and a calibration certificate in compliance with ISO 6789

Classic Mechanical Torque Wrench - non-length dependant



Unlike most other torque wrenches, the mechanism pivots around the square drive. This gives a major advantage in that the torque wrench is not length dependant. As a result there is no variation to the application of the preset torque value, no matter where the handle is grasped.

08-514 307 60
www.bonthron-ewing.se

