


PVDF flow chamber

For strong acid applications

Used together with Valmet strong acid sensors 4338 and 4339.


The set includes intermediate and slip-on flanges with appropriate parts for sensor mounting.

Technical data	K18806	K19005
Material	PVDF	PVDF
Process pressure	6 bar	6 bar
Process temperature	120 °C	120 °C
Process connection	ANSI 1"	DN25
Sensor connection	ANSI 2"	DN50
Flow direction	90°	90°
Spare parts	K18806	K19005
Intermediate flange	8823	8823
Slip-on flange	8848	8835

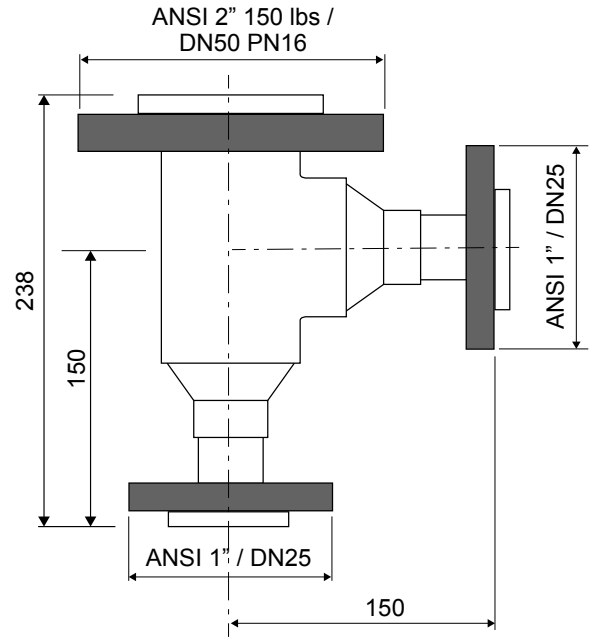

dimensions in mm

Sensor installation to flow chamber:

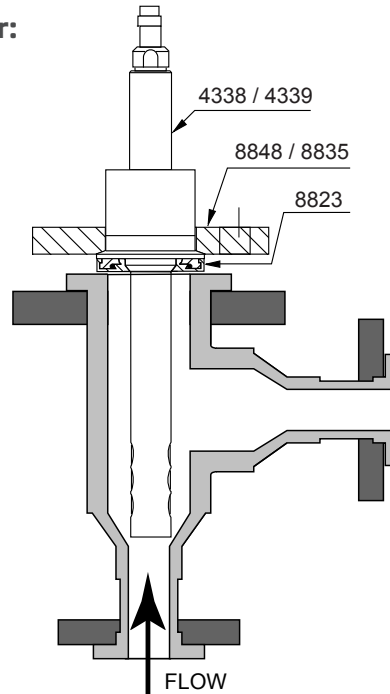

For more information, contact your local Valmet office. www.valmet.com

Specifications in this document are subject to change without notice.
Product names in this publication are all trademarks of Valmet Corporation.