


check valve series MV23




design	check valve straight through
material	body nickel plated brass, seals NBR
function	open passage in one direction, flow prevention in the opposite direction
thread connections	M5 according to ISO R/262, G1/8" ... G1/2" according to ISO228/1
mounting position	any
medium	compressed air, neutral gases
medium temperature	-10°C...+70°C
operating pressure	0,2...10bar
flow direction	is marked by an arrow

dimensions

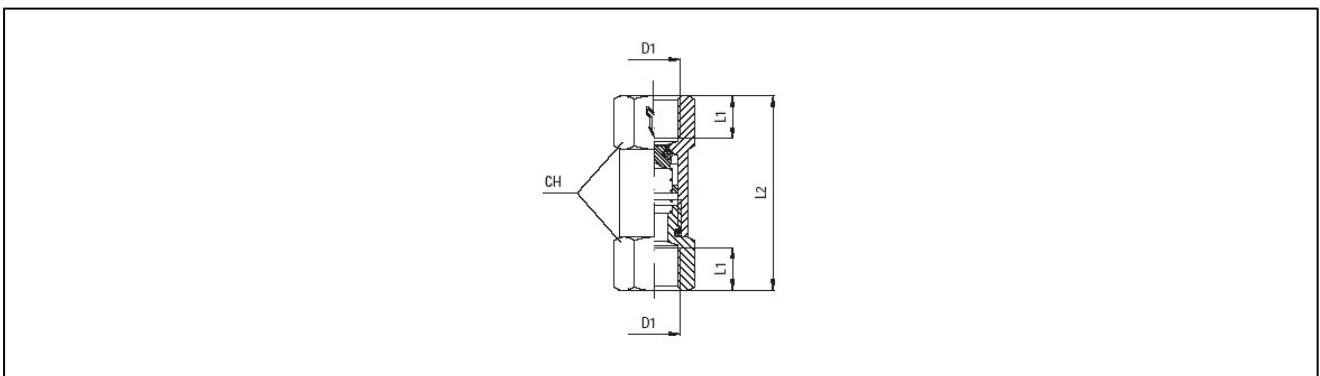

D1	L1	L2	nominal flow rate [NI/min]	CH	weight [g]	type
M5	5	25	160	8	8	MV23-00-M5
G1/8"	8	36,5	900	13	26	MV23-00-18
G1/4"	9	42,5	1500	16	38	MV23-00-14
G3/8"	10,5	51	2400	20	72	MV23-00-38
G1/2"	12,5	62	3400	24	119	MV23-00-12

flow rate tables

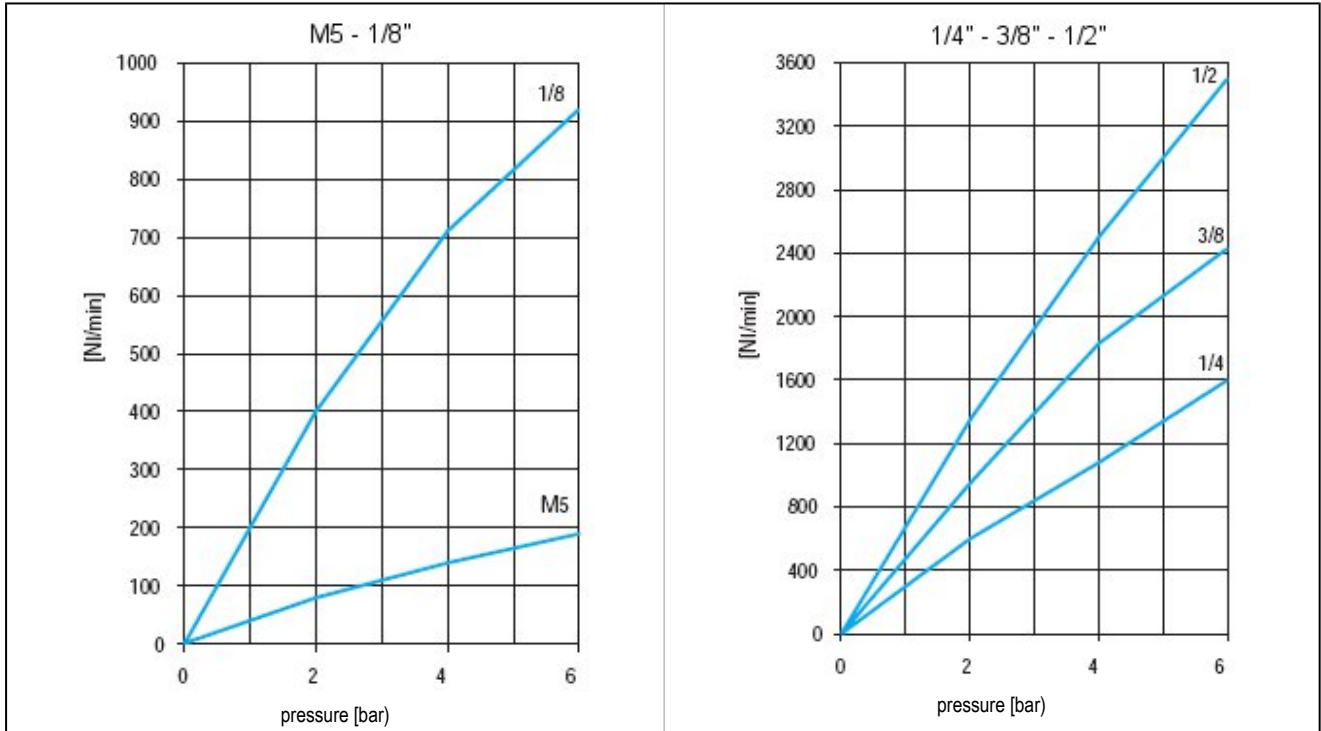

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice