




Features:

- 6 Digit, 7 Segment LED Totaliser
- Compact Size
- Inbuilt Sensor Supply

Size: 1/32 DIN 36mm X 72mm

Certifications:  

Technical Specifications

Input Specifications

Sensor Type	NPN / PNP
Input Type	Voltage pulse (3 to 30V DC) from Proximity switches, Solid state devices, Potential free contact encoder
Input Speed	a) 0 to 20Hz b) 0 to 1kHz
Reset	Front , Remote

Output Specifications

Sensor Supply	Inbuilt, 12V DC, 30mA
---------------	-----------------------

Functional Specifications

Range	9999999 counts
Counting Direction	Up
Memory	Yes


Supply Voltage

Supply Voltage	90 to 270V AC/DC (50 / 60Hz) 24V AC/DC (50 / 60Hz) -15% to 10% tolerance
Power Consumption	5VA max


Environmental Specifications

Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F)
Humidity (non-condensing)	95% RH
Weight	110 g (0.242 lbs)
Protection Level	IP40 for faceplate

Dimensions

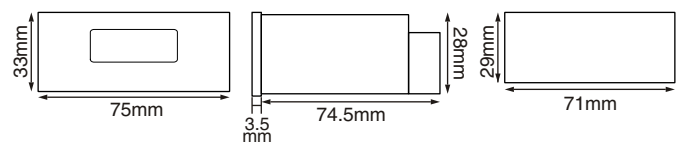

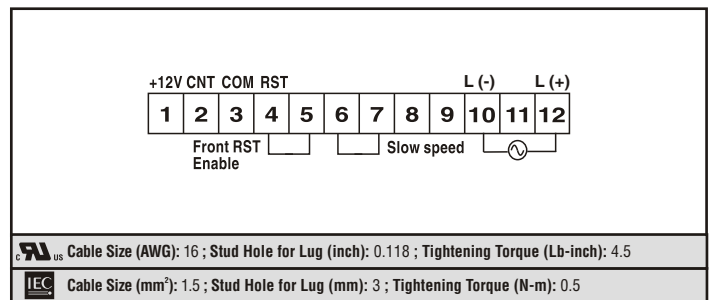

Terminal Connections



Ordering Information

This product is available in certified (UL and CE) as well as in non-certified (without UL/CE marking) types. Please order as per the requirement.

Part No.	Supply Voltage	Certification
XC410	90 to 270 V AC/DC	
XC410-CU	90 to 270 V AC/DC	 
XC410-24	24V AC/DC	
XC410-24-CU	24V AC/DC	