

DO NOT SCALE





THIRD ANGLE PROJECTION




DIMENSIONS IN MILLIMETRES

FIXING SCREW TORQUE SETTINGS

M4	2.2 Nm
M5	4.3 Nm
M6	7.3 Nm
M8	17.7 Nm
M10	35.5 Nm

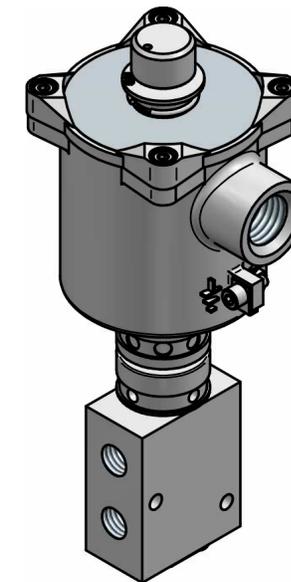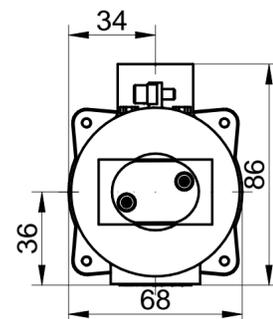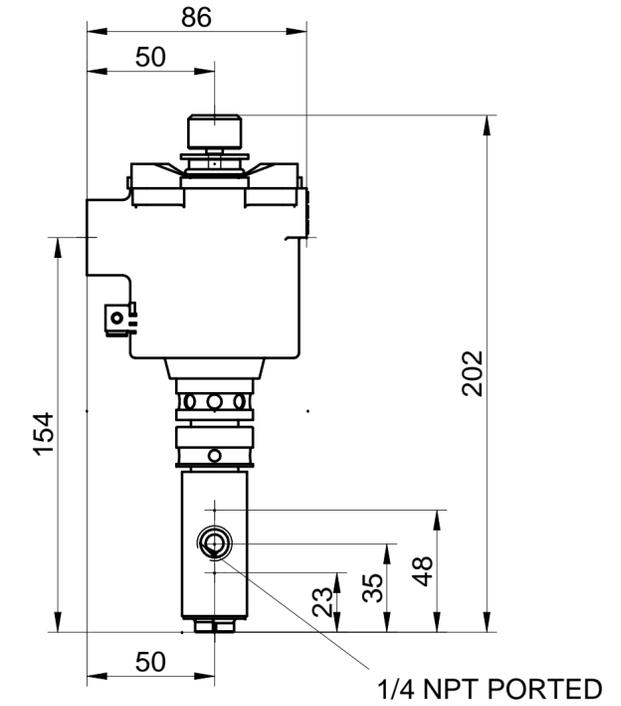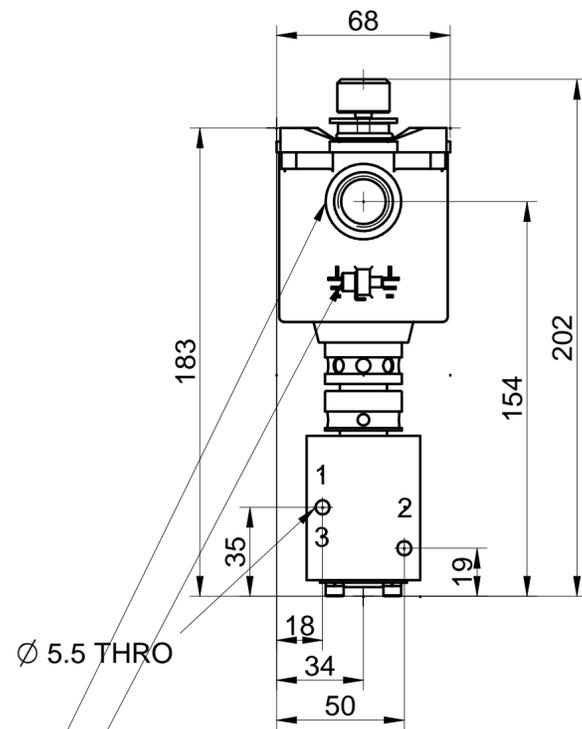

SCHEMATIC

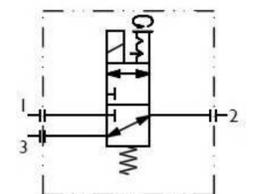

MAINSTAGE VALVE

- NPT PORTS STANDARD (BSP PORTS - K6 OPTION)
- SUITABLE FOR UNIVERSAL OPERATION 2/2 & 3/2 NORMALLY OPEN AND NORMALLY CLOSED
- PLUG PORT 3 FOR 2/2 NORMALLY CLOSED
- PLUG PORT 1 FOR 2/2 NORMALLY OPEN

SOLENOID

- M20 x 1.5 CONDUIT ENTRY (1/2" NPT - K85 OPTION)
- FULLY ROTATABLE HOUSING (FIXED HEAD SOLENOID - L209 OPTION)

NOTES :

1.) O-RING MATERIAL CODE 'X'

S = NITRILE  
 V = VITON  
 AL = FLUOROSILICONE  
 AG = SILICONE

2.) ALL DIMENSIONS NOMINAL UNLESS OTHERWISE STATED.

We take care to ensure that the product information in this configurator is reasonably accurate and up-to-date. However, our products are continually developed and updated so to ensure accurate and up-to-date information please contact a member of our sales team.

When selecting a product, the applicable operating system design must be considered to ensure safe use. The products function, material compatibility, adequate ratings, correct installation, operation and maintenance are the responsibilities of the system designer and user.



Bifold Fluidpower Limited  
 Bifold Group, Oldham Broadway Business Park, Chadderton, Gr. Manchester OL9 9XA  
 Telephone (44) 0161 345 4777 Fax (44) 0161 345 4780

PROJECT TITLE  
 FP06P-S2-04-32-NU-X-77X-X-MOR-X

PROJECT No.

DRAWING TITLE  
 GENERAL INSTALLATION

DRAWING No.  
 0-IN4069

REV.  
0

DRAWN  
 CONF

DATE  
 29.05.19

REV	DATE	DRAWN	REVISION
0	29.05.19	CONF	PRODUCTION ISSUE