



全漢企業股份有限公司  
FSP TECHNOLOGY INC.

台灣桃園市建國東路22號 統一編號：84239055  
No. 22, Jianguo East Road., Taoyuan City, Taiwan, R.O.C.  
TEL:+886-3-375-9888 Website : www.FSP-group.com  
FAX:+886-3-375-6966 Email : sales@fsp-group.com.tw

# SPECIFICATION



Released Date:2011/06/23-10:57:13



全漢企業股份有限公司  
FSP TECHNOLOGY INC.

台灣 桃園市建國東路 22 號  
NO.22, Jianguo E. Rd., Taoyuan City, Taiwan, R.O.C.  
TEL: +886-3-375-9888 FAX: +886-3-375-6966

# SPECIFICATION

## **FSP220-60LE(STD001)**

**9PA2201157**

**Main Feature:  
Active PFC Circuit  
Full Range Input**

**APR 8, 2010**

**REV: 02**



全漢企業股份有限公司  
FSP TECHNOLOGY INC.

**MODEL: FSP220-60LE**

**Revision History**

<u>Rev</u>	<u>Description</u>	<u>Date</u>	<u>Author</u>
02	UPDATE Erp DESCRIPTION	4.8	KARL

## 1. GENERAL DESCRIPTION AND SCOPE

This is the specification of Model FSP220-60LE; AC-line powered switching power supply with active PFC (Power Factor Correction) circuit, meet EN61000-3-2 and with Full Range Input features. Designed and manufactured by FSP GROUP.

The 5Vsb power is less than  $1W_{input}$  at power off mode (PS\_ON input at high state) which is comply with EuP Lot 6 year 2010 requirement.

The specification below is intended to describe as detailedly as possible the functions and performance of the subject power supply. Any comment or additional requirements to this specification from our customers will be highly appreciated and treated as a new target for us to approach.

## 2. REFERENCE DOCUMENTS

The subject power supply will meet the EMI requirements and obtain main safety approvals as following:

### 2.1 EMI REGULATORY

- FCC Part 15 Subpart J, Class 'B' 115 Vac operation.
- CISPR 22 Class 'B' 230 Vac operation.

### 3. PHYSICAL REQUIREMENTS

#### 3.1 MECHANICAL SPECIFICATIONS

The mechanical drawing of the subject power supply, which indicate the form factor, location of the mounting holes, location, the length of the connectors, and other physical specifications of the subject power supply. Please refer to the attachment drawing.

#### 3.2 CONNECTOR SPECIFICATIONS

The power supply connectors are:

- AC Inlet : Standard inlet socket 10A/250V, UL/CSA/VDE approved.  
 P1 : The equivalent of MOLEX 39-01-2200, 20 pin connector  
 PA,PB,PC, : The equivalent of AMP 1-480424-0, 4 pin connector  
 PD :The equivalent of AMP 171822-4, 4 pin connector  
 P2 :The equivalent of Molex 39-01-2040, 4pin connector

#### 3.3 CONNECTOR PIN DESIGNATIONS

The pin designations and color codes are defined as follows:

	P1 SYSTEM BOARD		PD DISK DRIVER		PA,PB,PC DISK DRIVER		P2 DISK DRIVER	
PIN1	+3.3V	ORANGE	+12V2	YELLOW	+12V2	YELLOW	COM	BLACK
PIN2	+3.3V	ORANGE	COM	BLACK	COM	BLACK	COM	BLACK
PIN3	COM	BLACK	COM	BLACK	COM	BLACK	+12V1	YELLOW/BLACK
PIN4	+5V	RED	+5V	RED	+5V	RED	+12V1	YELLOW/BLACK
PIN5	COM	BLACK						
PIN6	+5V	RED						
PIN7	COM	BLACK						
PIN8	PW-OK	GRAY						
PIN9	+5Vsb	PURPLE						
PIN10	+12V	YELLOW						
PIN11	+3.3V	ORANGE						
	+3.3VS	BROWN						
PIN12	-12V	BLUE						
PIN13	COM	BLACK						
PIN14	PS-ON	GREEN						
PIN15	COM	BLACK						
PIN16	COM	BLACK						
PIN17	COM	BLACK						
PIN18	NC	NC						
PIN19	+5V	RED						
PIN20	+5V	RED						

## 4. ELECTRICAL REQUIREMENTS

### 4.1 OUTPUT ELECTRICAL REQUIREMENTS

The subject power supply will meet all electrical specifications below, over the full operation temperature range and dynamic load regulation.

#### 4.1.1. OUTPUT RATING

Output	Nominal	Regulation	Ripple/Noise	Min	Max	peak
1	+3.3V	±5%	50mV	0.5A	14.0 A	
2	+5V	±5%	50mV	0.5A	16.0 A	
3	+12V1	±5%	120mV	1.0A	16.0 A	
4	+12V2	±5%	120mV	1.0A	10.0A	
5	-12V	±10%	120mV	0 A	0.8 A	
6	+5VSB	±5%	50mV	0 A	2.5A	

(1) 220W(50°C) : +3.3V + 5V + 12V1 + 12V2 = 207W

250W(25°C) : +3.3V + 5V + 12V1 + 12V2 = 237W

The +12V1 and +12V2 total output shall not exceed 17A.

(2) The +3.3V and +5V total output shall not exceed 110watts.

(3) total output for this subject power supply is 250 watts.

(4) Ripple and noise measurements shall be made under all specified load conditions through a single pole low pass filter with 20MHz cutoff frequency. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

#### 4.1.2. LOAD CAPACITY SPECIFICATIONS

The cross regulation defined as follows, the voltage regulation limits DC include DC Output ripple & noise.

##### 220W Load condition

No.	+3.3V	+5V	+12V1	+12V2	-12V	+5Vsb
FL1	14.0	12.76	5.0	3.75	0.4A	2.5
FL2	0.5	16.0	3.5	3.5	0.1A	2.5
FL3	14.0	0.5	1.0	1.0	0.1A	2.5
FL4	0.5	2.0	16.0	1.0	0.1A	0
FL5	0.5	1.5	1.0	10.0	0.1A	0
ML	0.5	0.5	0.5	0.2	0A	0
---	A					

## 250W Load condition

No.	+3.3V	+5V	+12V1	+12V2	-12V	+5Vsb
FL1	14.0	12.76	5.0	5.2	0.4	2.5
FL2	9.0	16.0	5.0	5.2	0.5	2.5
FL3	1.0	2.0	14.0	4.2	0.5	2.5
FL4	1.0	2.0	8.2	10.0	0.5	2.5
CR1	0.5	16.0	3.5	3.5	0.1	2.5
CR2	1.0	2.0	5.5	10.0	0.5	0
CR3	14.0	0.5	1.0	1.0	0.1	0
CR4	0.5	2.0	16.0	1.0	0.1	0
ML	0.5	1.5	1.0	1.0	0.1	0
---	A					

## 4.1.3. HOLD-UP TIME (@FULL LOAD)

220W:

115V / 60Hz : 17 mSec. Minimum.

230V / 50Hz : 17 mSec. Minimum.

The output voltage will remain within specification, in the event that the input power is removed or interrupted, for the duration of one cycle of the input frequency. The interruption may occur at any point in the AC voltage cycle. The power good signal shall remain high during this test.

## 4.1.4. OUTPUT RISE TIME

(10% TO 90% OF FINAL OUTPUT VALUE, @FULL LOAD)

115V-rms or 230V-rms + 5Vdc : 20ms Maximum

## 4.1.5. OVER VOLTAGE PROTECTION

Voltage Source	Protection Point
+ 3.3 V <sub>dc</sub>	3.5V-4.8V
+5V <sub>dc</sub>	5.5V-6.82V
+12V1 <sub>dc</sub> + +12V2 <sub>dc</sub>	13.4V-15.6V

#### 4.1.6.SHORT CIRCUIT PROTECTION

Output short circuit is defined to be a short circuit load of less than 0.1 ohm.

In the event of an output short circuit condition on +3.3V, +5V or +12V output, the power supply will shutdown and latch off without damage to the power supply. The power supply shall return to normal operation after the short circuit has been removed and the power switch has been turned off for no more than 2 seconds.

In the event of an output short circuit condition on -12V output, the power supply will not be damaged. The power supply shall return to normal operation as soon as the short circuit has been removed. and the power switch has been turned off for no more than 2 seconds.

#### 4.1.7.OVERLOAD PROTECTION

Overload currents defined as a 10 amp/sec fault current ramp starting from full load, applied to the +3.3V, +5V output, shall not cause that output to exceed 45 amps before the output voltage drops below 0.5 volts and is latched off. The +12V1,+12V2 output shall not exceed 25 amps under the same ramp conditions starting at full load before it is latched off.

The overload protection must be such that the power supply is protected from damage by entering a shutdown condition.

#### 4.1.8.POWER GOOD SIGNAL

The power good signal is a TTL compatible signal for the purpose of initiating an orderly star-up procedure under normal input operating conditions. This signal is asserted (low) until +5Vdc has reached 4.75 volts during power up. Characteristics:


TTL signal asserted (low state) : less than 0.5V while sinking 10mA.

TTL signal asserted (high state): greater than 4.75V while sourcing 500uA.

High state output impedance: less or equal to 1Kohm from output to common.

POWER GOOD @ 115/230V,FULL LOAD	100 –500mSec.
POWER FAIL @115/230V, FULL LOAD	1 mSec. minimum



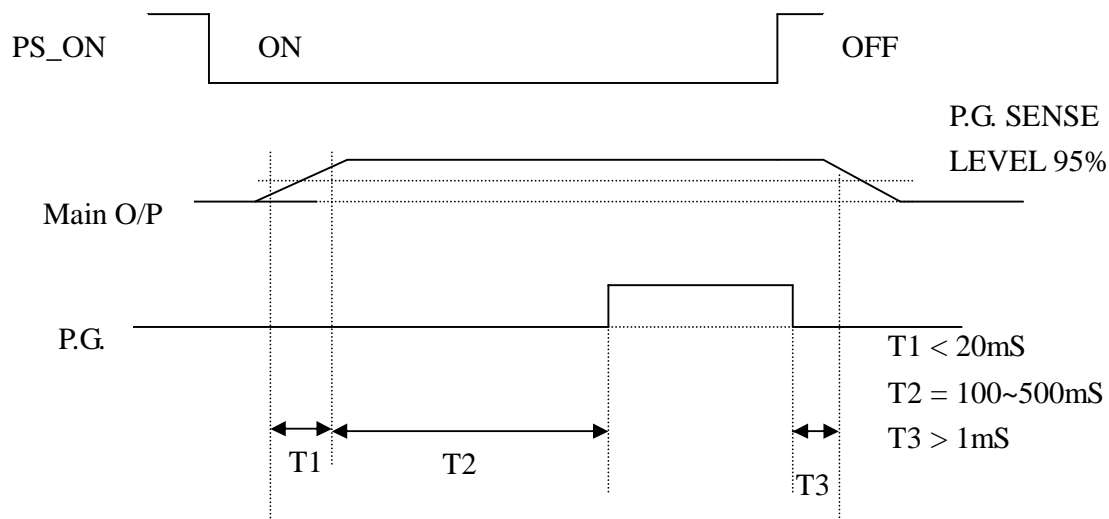

#### 4.2. OUTPUT TRANSIENT LOAD RESPONSE

+5V and +12V must be within specification for a step change in current as specified below. The outputs will be tested one section at a time with all other sections at maximum load. The test transition will be from IA to IB and IB to IA. The step current will have a nominal transition time of 0.5 amp per microsecond for +5V and 0.1 amp per microsecond for +12V.

##### +5Vdc:

IA:	16.0 amps
IB:	11.0 amps
Volts variation:	400 mV max (p-p)
Setting time:	10 ms max

##### +12V1dc:


IA:	16.0 amps
IB:	9.6 amps
Volts variation:	450 mV max (p-p)
Setting time:	10 ms max

##### +12V2dc:

IA:	10.0 amps
IB:	6.0 amps
Volts variation:	450 mV max (p-p)
Setting time:	10 ms max

**+3.3Vdc:**

IA: 14.0 amps  
 IB: 10.0 amps  
 Volts variation: 400 mV max (p-p)  
 Setting time: 10 ms max

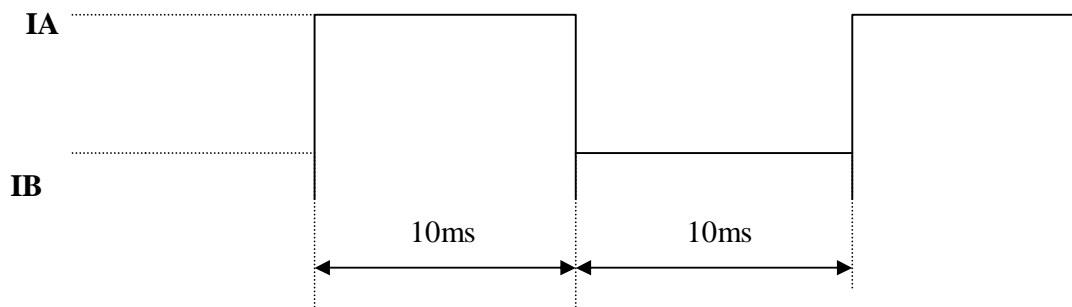

4.3. INPUT ELECTRICAL SPECIFICATIONS

4.3.1. VOLTAGE RANGE

	PARAMETER	UNITS
V-in Range	90 - 264	V-rms

4.3.2. INPUT FREQUENCY

INPUT FREQUENCY	47-63Hz
-----------------	---------

4.3.3. INRUSH CURRENT

(Cold start – 25 deg. C)

115V	No damage
230V	No damage

(No damage)

4.3.4. INPUT LINE CURRENT

115V	5.0 Amps – rms maximum
230V	3.0 Amps – rms maximum

#### 4.4. EFFICIENCY

	Full load (100%)	Typical load (50%)	Light load (20%)
115VAC	80%	80%	80%
230VAC	80%	80%	80%

Loading	220W(Loading shown in Amps)					
	+12V1	+12V2	+5V	+3.3V	-12V	+5Vsb
Full	7.93	4.95	6.91	6.05	0.4	1.24
Typical	3.96	2.48	3.45	3.02	0.2	0.62
Light	1.59	0.99	1.38	1.21	0.08	0.25

Loading	250W(Loading shown in Amps)					
	+12V1	+12V2	+5V	+3.3V	-12V	+5Vsb
Full	7.6	4.8	10.1	8.9	0.8	2.4
Typical	3.8	2.4	5.1	4.4	0.1	1.0
Light	1.5	1.0	2.0	1.8	0.1	0.5

#### 4.5. Standby Power Consumption (5Vsb):

Input Power < 1W @ 5Vsb/100mA & 230Vac input

PS\_ON input signal @ High State

#### 4.6. PS\_ON#

PS\_ON# is an active-low, TTL-compatible signal that allows a motherboard to remotely control the power supply in conjunction with features such as soft on/off, Wake on LAN+, or wake-on-modem. When PS\_ON# is pulled to TTL low, the power supply should turn on the five main DC output rails: +12VDC,+5VDC,+3.3VDC,-5VDC,and -12VDC. When PS\_ON# is pulled to TTL high or open-circuited, the DC output rails should not deliver current and should be held at zero potential with respect to ground. PS\_ON# has no effect on the +5VSB output, which is always enabled whenever the AC power is present. Table 15 lists PS\_ON# signal characteristics.

The power supply shall provide an internal pull-up to TTL high. The power supply shall also provide debounce circuitry on PS\_ON# to prevent it from oscillating on/off at startup when activated by a mechanical switch. The DC output enable circuitry must be SELV-compliant.

**Table 15. PS\_ON# Signal Characteristics**

	Min.	Max.
VIL, Input Low Voltage	0.0V	0.8V
IIL, Input Low Current (Vin = 0.4V)		-1.6mA
VIH, Input High Voltage (Iin = -200 μA)	2.0V	
VIH OPEN circuit, Iin = 0		5.25V

## 5. ENVIRONMENTAL REQUIREMENTS

The power supply will be compliant with each item in this specification for the following Environmental conditions.

### 5.1. TEMPERATURE RANGE

Operating	250W	0 to +25 deg. C
Operating	220W	0 to +50 deg. C
Storage		-20 to +80 deg. C

### 5.2. HUMIDITY

Operating	85% RH, Non-condensing
Storage	95% RH, Non-condensing

### 5.3. VIBRATION

The subject power supply will withstand the following imposed conditions without experiencing non-recoverable failure or deviation from specified output characteristics.

Vibration Operating – Sine wave excited, 0.25 G maximum acceleration, 10-250 Hz swept at one octave / min. Fifteen minute dwell at all resonant points, where resonance is defined as those exciting frequencies at which the device under test experiences excursions two times large than non-resonant excursions.

Plane of vibration to be along three mutually perpendicular axes.

### 5.4. SHOCK

The subject power supply will withstand the following imposed conditions without experiencing non-recoverable failure or deviation from specified output characteristics.

Storage –40G, 11 mSec. half-sine wave pulse in both directions on three mutually perpendicular axes.

Operating -10G, 11mSec. half-sine wave pulse in both directions on three mutually Perpendicular axes.

## 6. SAFETY

### 6.1. LEAKAGE CURRENT

The leakage current from AC to safety ground will not exceed 3.5 mA-rms at 264Vac, 50 Hz.

## **7. ELECTROMAGNETIC COMPATIBILITY**

### **7.1 LINE CONDUCTED EMI**

The subject power supply will meet FCC and VFG class B requirements under full load conditions.

### **7.2. RADIATED EMI**

The subject power supply will meet FCC and CISPR 22 requirements under normal load conditions.

## **8. LABELLING**

Label marking will be permanent, legible and complied with all agency requirements.

### **8.1. MODEL NUMBER LABEL**

Labels will be affixed to the sides of the power supply showing the following:

- Manufacturer's name and logo.
- Model no., serial no., revision level, location of manufacturer.
- The total power output and the maximum load for each output.
- AC input rating.

### **8.2 DC OUTPUT IDENTIFICATION**

Each output connector will be labeled.

## **9. RELIABILITY**

### **9.1. MTBF**

The power supply have a minimum predicted MTBF(MIL-HDBK-217) of 100,000 hours of continuous operation at 25°C, maximum-output load, and nominal AC input voltage.

## 80 PLUS Verification and Testing Report


TYPICAL EFFICIENCY (50% Load):	80.90%
AVERAGE EFFICIENCY:	80.41%
80 PLUS COMPLIANT:	YES




Ecos ID #	181
Manufacturer	FSP Group Inc.
Model Number	FSP220-60LE
Serial Number	S6491000017
Year	2007
Type	1U
Test Date	3/8/2007

Rated Specifications	Value	Units
Input Voltage	100-240	Volts
Input Current	4-2	Amps
Input Frequency	60-50	Hz
Rated Output Power	250	Watts

Note: All measurements were taken with input voltage of 115 V nominal and 60 Hz.

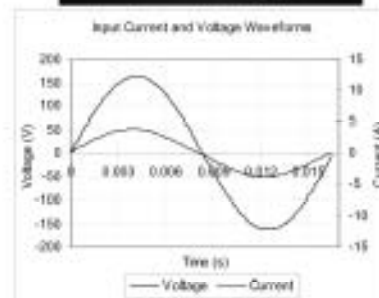

Input A	PF	I <sub>in</sub> (%)	Load (%)	Fraction of Load	Input Watts	DC Terminal Voltage (V) DC Load Current (A)						Output Watts	Efficiency %
						12V1	12V2	-12V	3.3V	5V*	5VSB		
0.55	0.98	8.5%	20%	Light	62	12.2/1.5	12.2/1	11.2/0.1	3.3/1.8	5.1/2	5/0.5	50	80.32%
1.32	0.99	5.9%	50%	Typical	151	12.2/3.8	12.2/2.4	12.2/0.1	3.3/4.4	5/5.1	4.9/1	122	80.90%
2.72	1.00	3.8%	100%	Full	312	12.2/7.6	12.1/4.8	11.3/0.8	3.3/8.9	4.9/10.1	4.9/2.4	240	80.02%

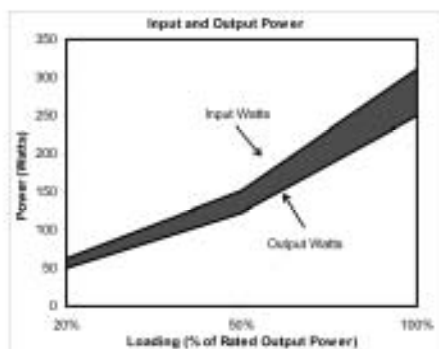

**EPRI** | ELECTRIC POWER RESEARCH INSTITUTE

These tests were conducted as a part of the 80 PLUS program. 80 PLUS is a computer buy-down program to promote high-efficiency power supplies (greater than 80% efficiency in the active mode) in desktop computers and desktop-derived servers.



Tested by Electric Power Research Institute, Knoxville, TN.